


RFID Inlay Spiro Impinj Monza M750

Dimensions (WxH)

20 mm X24 mm (0.78 " X 0.936 ")

DESCRIPTION

Tailored for small packaging, Spiro boasts ARC Spec S certification and DoseID approval, ideal for healthcare and pharma. Apply it effortlessly to glass or plastic containers, showcasing exceptional performance, even in the presence of liquids. Elevate your RFID strategy with Spiro, with uses for inventory control across retail and healthcare.

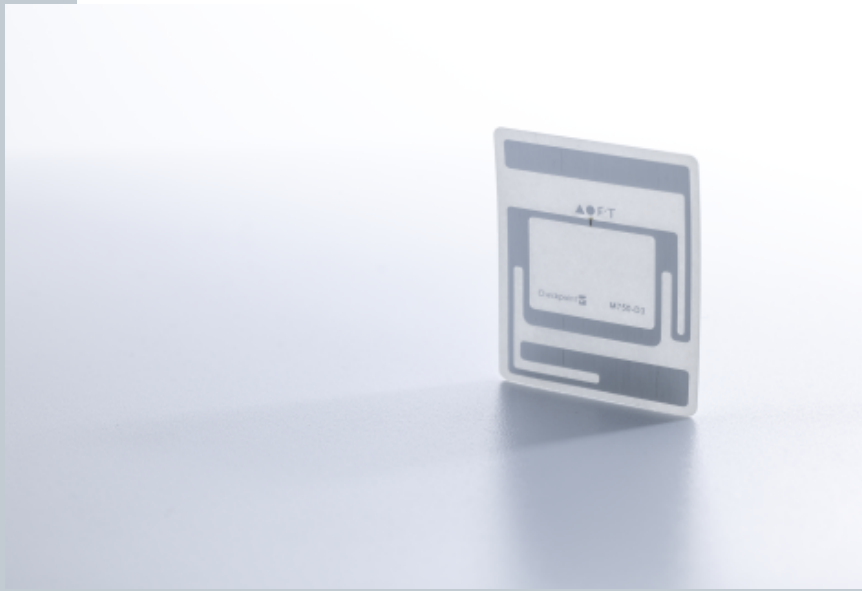

RFID SPECIFICATIONS

Protocol	ISO/IEC 18000-63:2015 and EPC global Gen2v2 compliant. It also supports Impinj Gen2X
Operating Frequency	860 Mhz - 960 Mhz
Chip Type	Monza M750
Unique TID / UID	96 bits
EPC Memory	96 bits
User Memory	32 bits
Tag type	UHF

INDUSTRIES

Healthcare Retail Apparel

APPLICATIONS



Inventory visibility



Store processes (Cycle Count /
item locator / POS)

ARC CATEGORIES

Spec S

OTHER CERTIFICATIONS




PERFORMANCE

ETSI Read Range	2.10 m
FCC Read Range	1.60 m

READ RANGE



Free Space, Light, & Heavy Loading Conditions

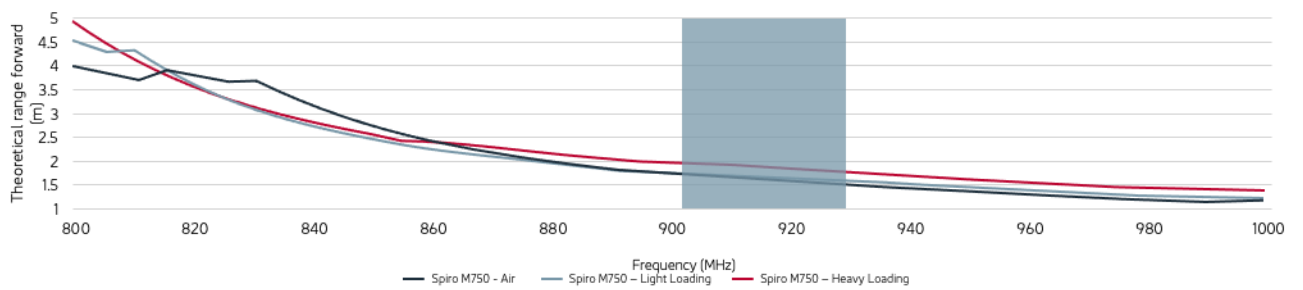

ORIENTATION SENSITIVITY

ETSI

FCC

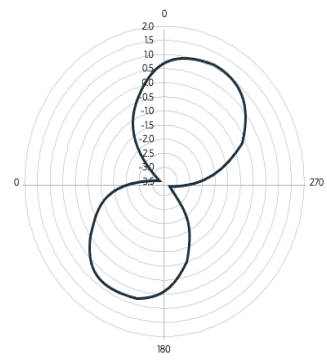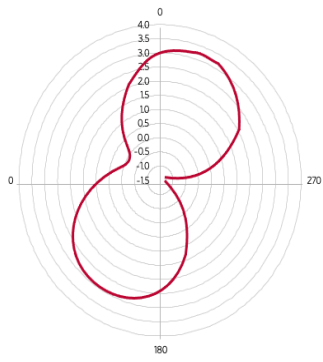

HANDLING GUIDELINES

Read our handling and best practice [guidelines](#)