


# RFID Inlay Uno Mini NXP Ucode 9 XE

**Dimensions (WxH)**

63 mm X31 mm (2.457 " X 1.209 ")

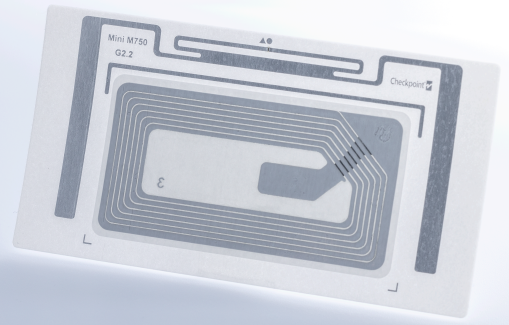

**DESCRIPTION**

UNO is a game-changer for retailers, combining RF and RFID technologies in one label. For those at the beginning of their RFID journey, UNO saves time and money by maintaining existing tagging procedures and working with existing RF EAS hardware and strategies, meaning no expensive store hardware upgrades. Enjoy the benefits of enhanced inventory control and visibility with RFID without compromising on your asset protection.

**RFID SPECIFICATIONS**

Protocol	ISO/IEC 18000-6C/ EPC Class 1 Gen2
Operating Frequency	860 Mhz - 960 Mhz
Chip Type	Ucode 9 XE
Unique TID / UID	96 bits
EPC Memory	128 Bits
User Memory	No data
Tag type	UHF

**INDUSTRIES**

Retail Apparel

**APPLICATIONS**



Inventory visibility




Omnichannel



Store processes (Cycle Count / item locator / POS)

**ARC CATEGORIES**

**OTHER CERTIFICATIONS**

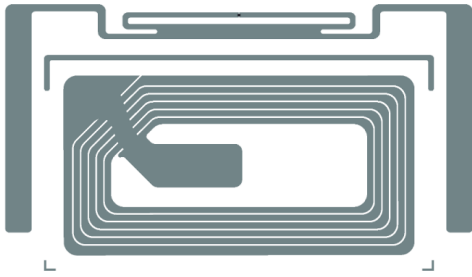


**PERFORMANCE**

ETSI Read Range	16.90 m
FCC Read Range	10.10 m

**READ RANGE**

Free Space, Light, & Heavy Loading Conditions

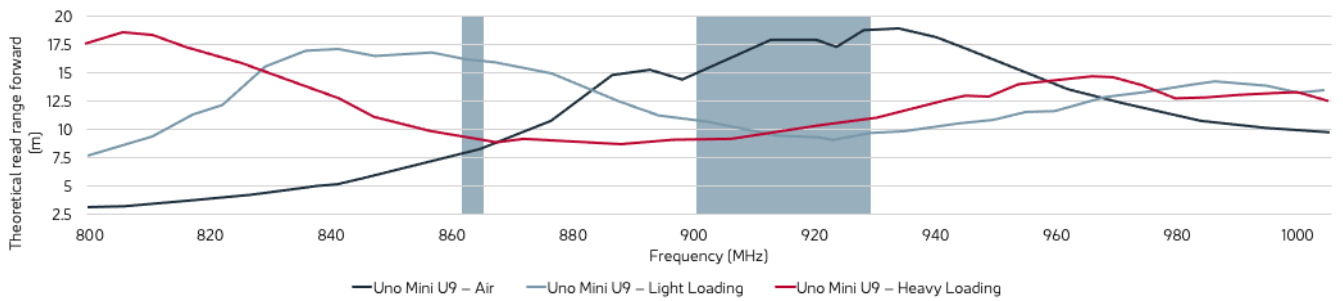

**ORIENTATION SENSITIVITY**

ETSI

FCC

