


# RFID Inlay Breeze Impinj Monza M750

**Dimensions (WxH)**

42 mm X16 mm (1.638 " X 0.624 ")

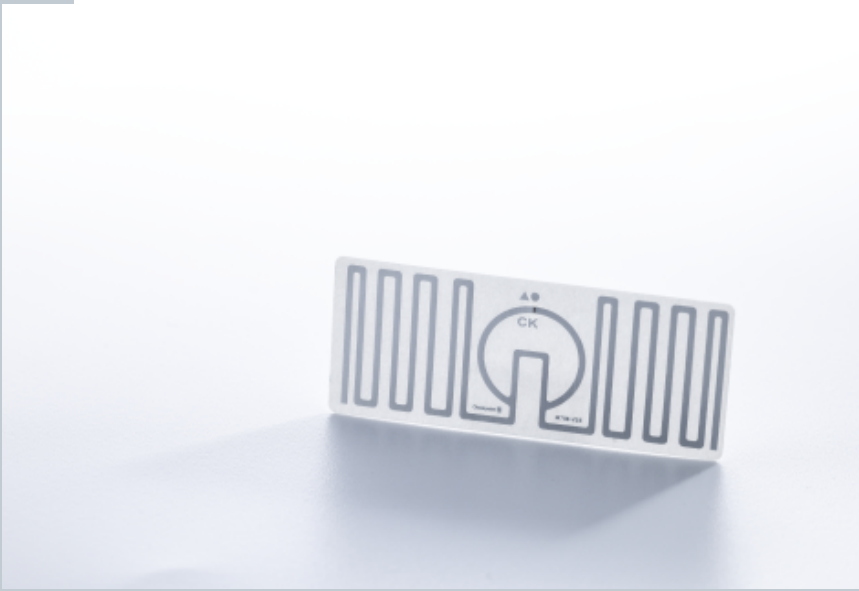

**DESCRIPTION**

Boasting a high-performance read rate, Breeze excels as your RFID inlay of choice in supply chain visibility. With a versatile design that seamlessly integrates into various product types, such as stickers, hangtags and integrated packaging, it's one of the most adaptable inlays in our portfolio. With high detection rates, Breeze can also be deployed for RFID as loss prevention applications in retail, as well as for inventory management.

**RFID SPECIFICATIONS**

Protocol	ISO/IEC 18000-63:2015 and EPC global Gen2v2 compliant. It also supports Impinj Gen2X
Operating Frequency	860 Mhz - 960 Mhz
Chip Type	Monza M750
Unique TID / UID	96 bits
EPC Memory	96 bits
User Memory	32 bits
Tag type	UHF

**INDUSTRIES**

Retail Apparel                      Retail Cosmetics

**APPLICATIONS**



Inventory visibility



Omnichannel




Store processes (Cycle Count / item locator / POS)

**ARC CATEGORIES**

Spec O                                      Spec Q                                      Spec W5  
Spec W6                                      Spec F

**OTHER CERTIFICATIONS**

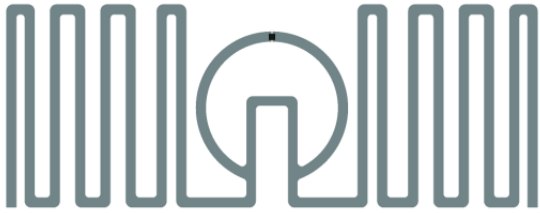


## PERFORMANCE

ETSI Read Range	15.60 m
FCC Read Range	10.00 m

## READ RANGE

Free Space, Light, & Heavy Loading Conditions

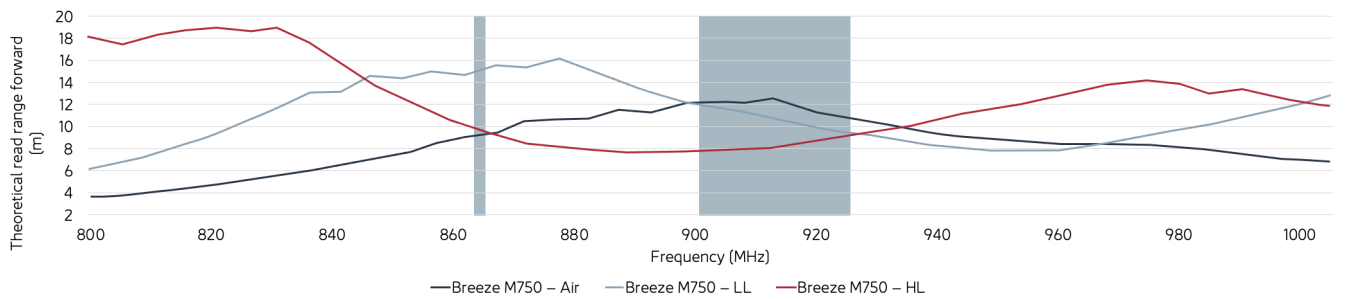

## ORIENTATION SENSITIVITY

ETSI

FCC

